


Invar Cutting & Drilling

Utilizing Photonics Industries' RX Series Low Power Picosecond Laser

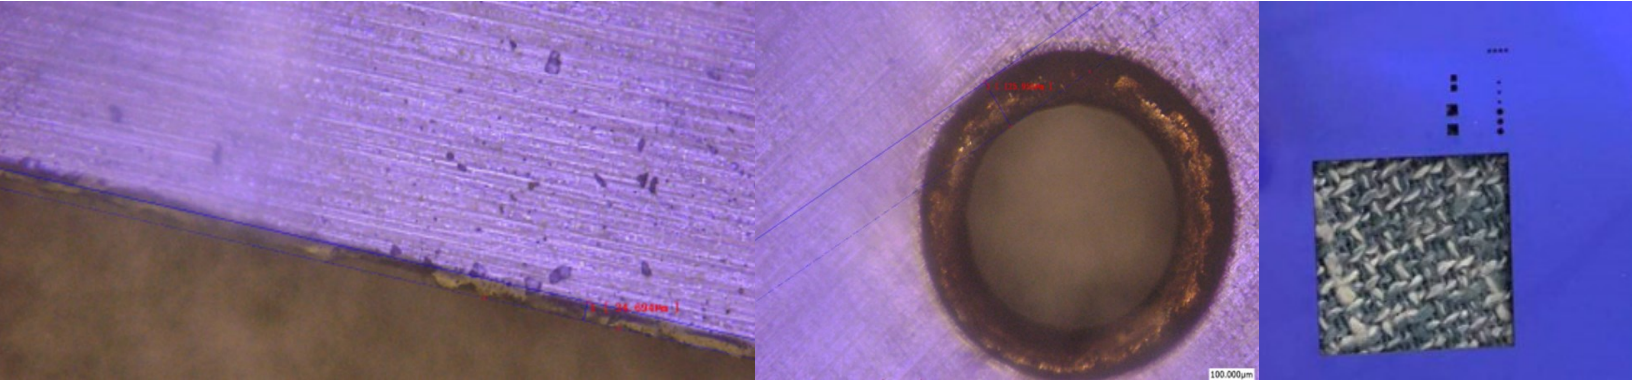

Sample Information

The material type is Invar, an iron-nickel alloy. Specific sample thickness is 0.15mm.

The picosecond laser cutting and drilling followed the requirements of maintaining a very low heat-affected zone (HAZ) to ensure little to no blackening and discoloration occurs.

System Information

Laser Source: RX 1064-30 Wavelength: 1064nm Power: 30W

Processing Equipment: Beam Expander 8x, F-Theta Lens Linos 100mm

Test Data

The parameters set to produce the best results on this specific sample were Frequency set to 100kHz, Pulse Energy Control (PEC) set to 60%, Scanning Speed 300mm/s, Number of Cuts 100, and Power Level 15W.



Photonics Industries
International, Inc.

RX Series Low Power Picosecond Lasers

Available in the Infrared, Green, and Ultraviolet wavelengths.

Picosecond Lasers for Industry and Science by Photonics Industries...

Photonics Industries' RX Series picosecond lasers offer high performance, high precision, and robust form for the most demanding industrial as well as scientific applications. Photonics Industries is proven, with over a thousand picosecond lasers shipped worldwide, to meet and fulfill precision needs in manufacturing, accurate laser ranging, and new, emerging requirements necessitating ever smaller pulse widths.



Applications

- Metal, Ceramic, Glass, & Sapphire - Cutting, Drilling, Marking
- Flat Panel Display (FPD) Functional Foils & Display Glass - Cutting, Scribing
- Solar Cells - Scribing, Patterning
- LED - Scribing, Patterning, Dicing
- Medical Device - Cutting, Drilling, Marking
- Glass Reinforced Plastic, & Carbon Fiber - Cutting
- Ink-Jet Nozzle - Drilling
- Printing & Embossing Tools
- 3D LIDAR
- Nanotexturing

Features

- Short pulse laser:
 < 10 ps for IR, ~7 ps for Green & UV
- Wide range of wavelengths:
 1064 nm, 532 nm, 355 nm
- Superior form factor as the most compact, rugged, All-in-One picosecond laser
- Highest efficiency picosecond laser with the lowest power consumption:
 < 400 W typical
- High repetition rates:
 Up to 8 MHz
- Excellent TEM₀₀ beam:
 Typical M² ≤ 1.2
- Exceptional Beam Pointing Stability:
 < 20 µrad
- Exceptional and Versatile Pulse Control:
 PEC (Power or Pulse Energy Control)
 Burst Mode with programmable amplitude capability
 PSO (Position Synchronized Output) support for constant pulse energy regardless of trigger rate

Copyright © 2021 by Photonics Industries International, Inc.

Main Headquarters: 1800 Ocean Ave, Ronkonkoma, New York 11779, United States


Photonics Industries International is the pioneer of intracavity harmonic lasers and is at the forefront of developing, manufacturing and marketing a wide range of nanosecond, sub-nanosecond, picosecond and femtosecond lasers for industrial, scientific, defense, and medical industries. Check out our [products](#) and see how we can help you [apply](#) our lasers to your needs.

[Website](#) - [Products](#) - [Applications](#) - [Company](#) - [Contact](#) - [International Network](#)



光と人をつなぐ

Rayture Systems



レイチャーシステムズ株式会社

〒160-0006 東京都新宿区舟町7 ロクサンビル7F

TEL : 03-3351-0717 FAX : 03-3351-6771

URL : <http://www.rayture-sys.co.jp>

E-mail : laser@rayture-sys.co.jp