

DX Air-Cooled UV/Green Series Nanosecond Lasers www.photonix.com

Overview

A pioneer of intracavity generation with 28+ years of manufacturing experience and tens of thousands of shipments worldwide, Photonics Industries offers the broadest nanosecond (ns) UV product selection from 1W to 50W* at 355nm and Green product selection from 2W to 100W* at 532nm.

With its new revolutionary packaging, our new DX Air-Cooled Series has smaller form factor, higher performance and shorter pulse widths compared to its ancestor, the DCH series, providing the most compact UV output powers from 1W to 10W and Green output powers from 2W to 15W. The DX Air-Cooled Series lasers provide the highest average power from one of the smallest footprint, lightest weight short pulse width, high peak power air-cooled industrial ns lasers commercially available in UV and Green.

Owing to key patented technologies, intracavity harmonic generation is inherently a more efficient harmonic conversion that provides unmatched superior beam quality, as well as better beam pointing stability in a simple, compact laser configuration making this laser the perfect tool for precision manufacturing.

Standard feature-rich packed software allowing for adjustable output power using real-time TTL and/or analog control signals enables high quality process optimization all with ease of handling, high throughput, uncompromised process quality and long-term stability in 24/7 applications with a low Cost of Ownership (COO).



Features – *The Advantage of Photonics Industries*

- ▶ **High power** air-cooled UV and Green ns laser
- ▶ The **most compact, most efficient** air-cooled laser
- ▶ The **highest wall plug efficiency** ranging from ~20% to 50% more efficient depending on the specific model.
- ▶ **Shortest pulse width** w/ rep rates up to 500 kHz
- ▶ Patented **intracavity** UV and Green generation
- ▶ **Highest pulse energy laser in the market**
- ▶ Power consumption <50 W
- ▶ Excellent TEM₀₀ beam with typical M²<1.1
- ▶ **Superior pulse stability**, typically ~1%
- ▶ **Exceptional beam pointing stability** < 20 μrad
- ▶ **Monolithic All-In-One (AIO)** ns UV/Green Laser
- ▶ Water-cooled option available

Applications

- ▶ Laser Trimming of Embedded Passives
- ▶ Glass Marking
- ▶ Laser Direct ITO/TCO Patterning
- ▶ LED and Medical Package Marking
- ▶ Solar P1 to P3 Processing
- ▶ Thin-film Scribing ▶ Thin-film Annealing
- ▶ Rapid Prototyping/Stereolithography
- ▶ PCB Drilling and Structuring
- ▶ Markings of Plastic ▶ Cutting of Metals
- ▶ LIDAR ▶ MALDI



System Specifications – UV Series

Specifications	Model			
	DX-355-1	DX-355-5	DX-355-8	DX-355-10
Output Characteristics				
Wavelength (nm)	355 nm			
Average Power (W)	0.8 W at 20 kHz, 1 W at 50 kHz	5 W at 50 kHz, 4 W at 100 kHz	8 W at 50 kHz, 7 W at 100 kHz,	10 W at 50 kHz, 8 W at 100 kHz,
Pulse Energy (μ J)	~20	~100	~150	~200
Pulse Width (ns) (nominal)	< 15 at 50 kHz 20 at 100 kHz			
Repetition Rate	Single shot to 200 kHz (Option to 300 kHz)			
Pulse to Pulse Stability†	< 2% rms			
Long Term Stability‡†	< 2% rms			
Beam Characteristics				
Polarization Ratio	Horizontal; 100:1			
Beam Diameter at exit	~0.3 mm	~0.45 mm		
Beam Divergence (Full Angle Far Field)	< 2.5 mrad			
Beam Circularity	~90%			
Spatial Mode (M2)	TEM ₀₀ M ² <1.1			
Beam Pointing Stability	< 20 urad			
Operating Specifications				
Interface	Ethernet / RS 232 / GUI / External TTL Triggering			
Warm-up Time	< 10 min			
Electrical Requirement	100 to 240 V AC			
Line Frequency	50 to 60 Hz			
Power Consumption (Typical)	~50 W	~130 W		
Ambient Temperature**	10°C to 30°C (50°F to 86°F) Operating Range, RH 90% Max, non-condensing			
Storage Conditions	-10°C to 40°C; Sea Level to 12,000 m; 0% to 90% RH, non-condensing			

† Measured at ambient temperature of $\pm 2^\circ\text{C}$

**For operation outside this temperature range, contact us

‡ 8 hours $\pm 1^\circ\text{C}$




Photronics Industries
International, Inc.

	DX-355-1	DX-355-5	DX-355-8	DX-355-10
Physical Characteristics				
Dimensions*	3.38 in x 5 in x 9 in	5 in x 5 in x 11 in		
Weight	~10 lbs	~15.5 lbs		
Cooling System	Air-Cooled			

*Dimensions include air-cooled heatsinks. Water-cooled heatsink options are available (see dimensional drawings)

Performance Curves – UV Series

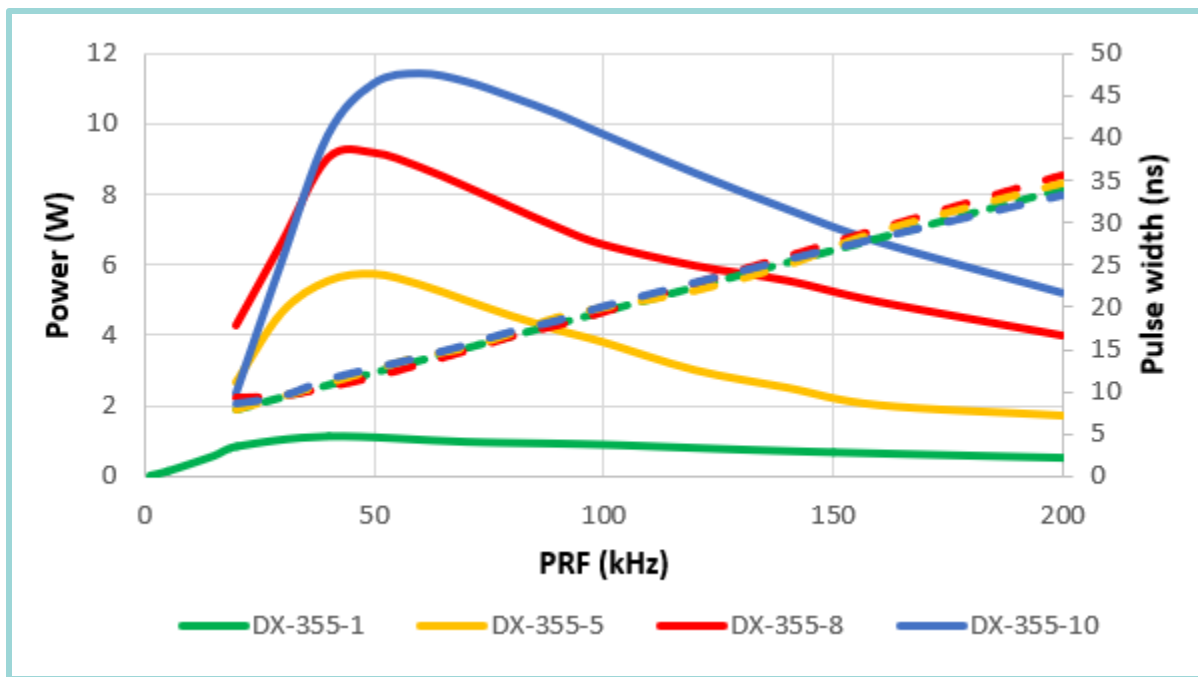

Photronics Industries
International, Inc.

System Specifications – Green Series

Specifications	Model		
	DX-532-2	DX-532-10	DX-532-15
Output Characteristics			
Wavelength (nm)	532 nm		
Average Power (W)	2 W at 50 kHz, 2 W at 100 kHz	10 W at 50 kHz, 10 W at 100 kHz	15 W at 50 kHz, 15 W at 100 kHz
Pulse Energy (μ J)	~40	~200	~300
Pulse Width (ns)	~15 at 50 kHz ~20 at 100 kHz		
Repetition Rate	Single shot to 300 kHz (Option to 500 kHz)		
Pulse to Pulse Stability†	< 2% rms		
Long Term Stability‡†	< 2% rms		
Beam Characteristics			
Polarization Ratio	Vertical; 100:1		
Beam Diameter at exit	~0.3 mm	~0.45 mm	
Beam Divergence (Full Angle Far Field)	< 3 mrad	< 2.5 mrad	
Beam Circularity	~90%		
Spatial Mode (M2)	TEM ₀₀ M ² <1.1		
Beam Pointing Stability	< 20 urad		
Operating Specifications			
Interface	Ethernet / RS 232 / GUI / External TTL Triggering		
Warm-up Time	< 10 min		
Electrical Requirement	100 to 240 V AC		
Line Frequency	50 to 60 Hz		
Power Consumption (Typical)	~50 W	~130 W	
Ambient Temperature**	10°C to 30°C (50°F to 86°F) Operating Range, RH 90% Max, non-condensing		
Storage Conditions	-10°C to 40°C; Sea Level to 12,000 m; 0% to 90% RH, non-condensing		

† Measured at ambient temperature of $\pm 2^\circ\text{C}$

**For operation outside this temperature range, contact us

‡ 8 hours $\pm 1^\circ\text{C}$




Photronics Industries
International, Inc.

	DX-532-2	DX-532-10	DX-532-15
Physical Characteristics			
Dimensions*	3.38 in x 5 in x 9 in	5 in x 5 in x 11 in	
Weight	~10 lbs	~15.5 lbs	
Cooling System	Air-Cooled		

*Dimensions include air-cooled heatsinks. Water-cooled heatsink options are available (see dimensional drawings)


Performance Curves – Green Series

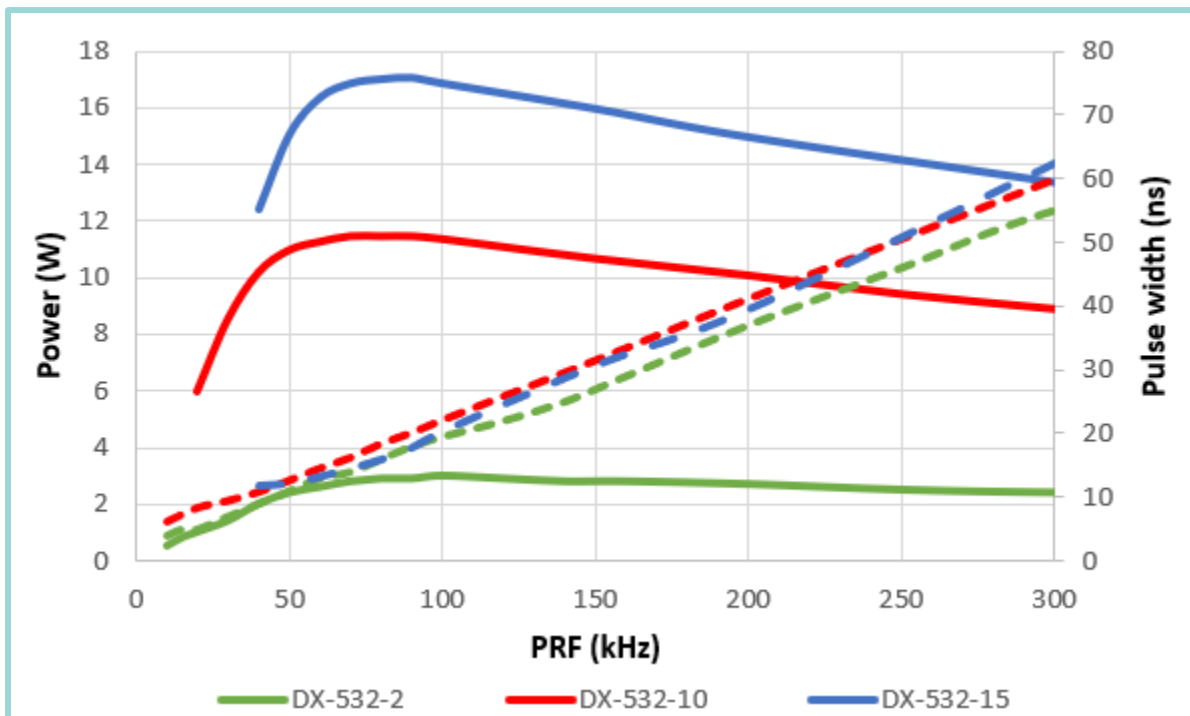


Photronics Industries
International, Inc.

Dimensional Drawings

DX-355-1 & DX-532-2

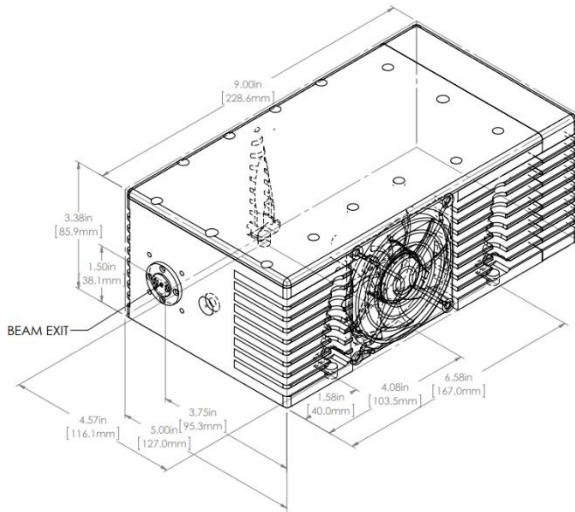


W/ Air-Cooled Heatsink

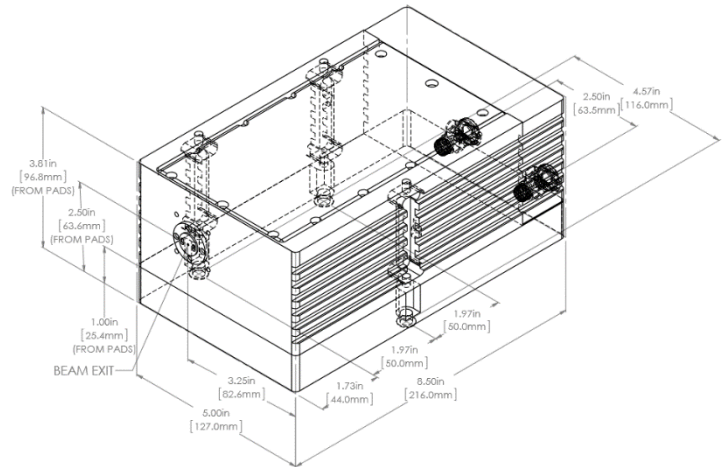


W/ Water-Cooled Version

DX-355-5, 8 & 10; DX-532-10 & 15

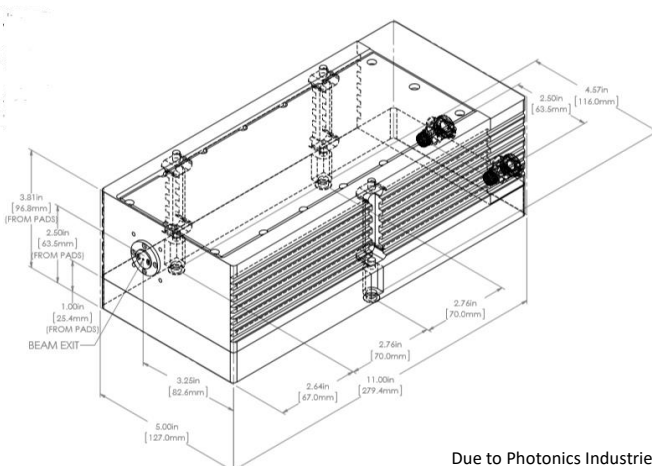

W/ Water-Cooled Heatsink

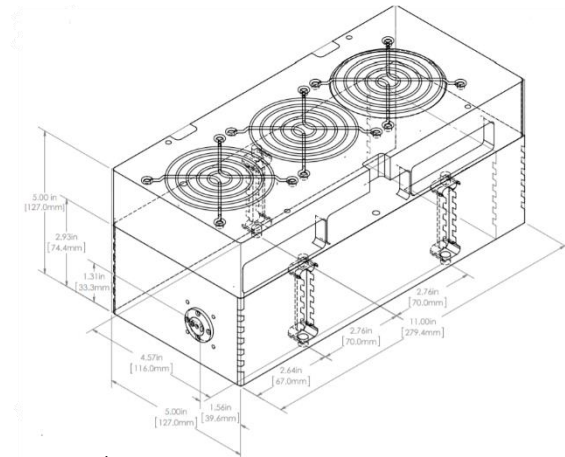

W/ Air-Cooled Heatsink

Due to Photonics Industries' commitment to continuous product improvement, specifications and drawings are subject to change without notice.

Photonics Industries conforms to provisions of US 21 CFR 1040.10 & 1040.11 and is made under one or more US patents listed below: 9,531,147, 8,817,831, 7,869,471, 7,346,092, 7,082,149, 7,079,557, 6,999,483, 6,980,574, 6,961,355, 6,842,293, 6,762,405, 6,690,692, 6,587,487, 6,584,134, 6,366,596, 6,356,578, 6,327,281, 6,246,707, 6,229,829, 6,108,356, 6,061,370, 6,028,620, 5,936,983, 5,898,717 and Pending Patents

Copyright © 2021 by Photonics Industries International, Inc.

Main Headquarters: 1800 Ocean Ave, Ronkonkoma, New York 11779, United States

[Photonics Industries International](#) is the pioneer of [intracavity harmonic lasers](#) and is at the forefront of developing, manufacturing and marketing a wide range of nanosecond, sub-nanosecond, picosecond and femtosecond lasers for industrial, scientific, defense, and medical industries. Check out our [products](#) and see how we can help you [apply](#) our lasers to your needs!

[Website](#) - [Products](#) - [Applications](#) - [Company](#) - [Contact](#) - [International Network](#)



Photonics Industries
International, Inc.

光と人をつなぐ

Rayture Systems



レイチャーシステムズ株式会社

〒160-0006 東京都新宿区舟町7 ロクサンビル7F

TEL : 03-3351-0717 FAX : 03-3351-6771

URL : <http://www.rayture-sys.co.jp>

E-mail : laser@rayture-sys.co.jp