

GECCO LASER DATASHEET

SELF-STARTING FEMTOSECOND LASER

Novanta develops photonics solutions specializing in cutting-edge components and sub-systems for laser-based diagnostic, analytical, micromachining and fine material processing applications. Powerful lasers, coupled with advanced beam steering and intelligent sub-systems incorporating software and controls, deliver extreme precision and performance, tailored to our customers' demanding applications.

DESIGNED FOR INTEGRATION

The gecco is a fully equipped, compact femtosecond laser in a sealed enclosure, offering an average power of >1 W and with a choice of <15 fs or <20 fs pulse durations. The gecco is offered with repetition rates of 80 MHz (70-110) with optional repetition rate locking to an external source.


Designed for simple installation and system integration, the gecco oscillator features a highly compact, vibration resistant laser head with integrated pump source, and a separate, fully featured control unit.

This highly stable laser boasts an industry leading lifetime, very low cost of ownership and comes with 2 year/5000 hours warranty covering all operating specifications.




OPTIONAL REPETITION RATE AND ACTIVE FEEDBACK

If required, active repetition rate control can be implemented for locking to an external signal source. Coarse repetition rate control is enabled by motorised mirror movement, whereas high-speed and large-amplitude feedback is realised using 2 piezomechanic transducers. Regulation through the TL-1000 repetition rate stabilisation unit achieves a timing jitter <100 fs (0.1 Hz to 100 kHz). Alternatively, the 2 piezos can be driven by customer supplied electronics.

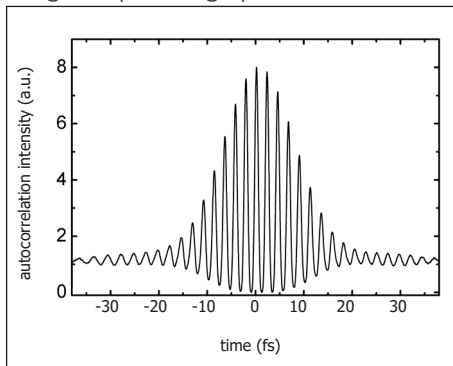

Autocorrelation trace of **gecco** indicating emission of pulses with 15 fs duration.

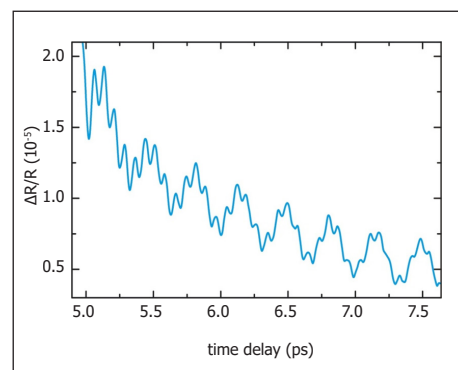

Application example: Pump-probe signature of coherent optical phonons in ZnO measured with the **gecco**.

GECCO LASER DATASHEET

Specification*	gecco one
Average Output Power	>600 mW
Centre Wavelength	800 nm \pm 20 nm
Pulse Duration ¹	<20 fs
Spectral FWHM	>40 nm
Repetition Rate ²	80 MHz (70-110 MHz Options)
Pulse Energy ⁵	>7.5 nJ
Beam Size ^{3,5}	0.8 mm \pm 0.3 mm
Divergence ⁵	<3 mrad
M-squared	<1.2
Power Stability (RMS Within 24 Hours)	<1%
RMS Noise ⁴	<0.1% <0.05% (With 'Pure' Option)
Polarization Ratio	>100:1
Polarization Direction	Horizontal
Operating Temperature	21°C \pm 5°C
Warm-up Time	<20 minutes
Weight (Head Only)	-30 kg

Notes:

* Laser Quantum operates a continuous improvement programme which can result in specifications being improved without notice.

¹ After appropriate extracavity dispersion compensation (not included).

² Choose repetition rate upon order. Repetition rate accuracy 3 100 kHz.



³ FWHM beam diameter at laser exit.

⁴ Noise bandwidth 1 Hz to 1 MHz.

⁵ At 80 MHz repetition rate, different at other repetition rates.

GECCO LASER DATASHEET

DIMENSIONS

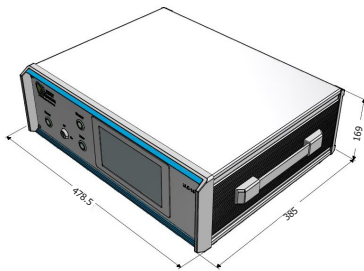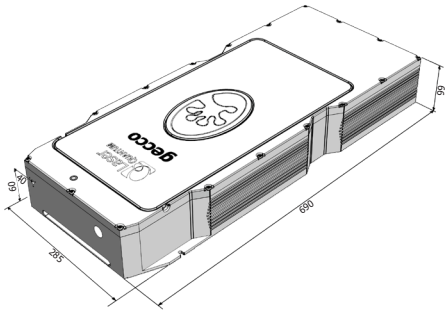

ADDITIONAL INFORMATION

- Cooling system included
- 2 years/5000 hours (PSU 'on' time) full specification warranty
- 80 MHz (70 -110 MHz options)
- Pulse duration and power options
- Stable, long term mode-lock
- Integrated PZT for active repetition rate stabilisation
- The gecco can be used with dedicated software that allows the laser to be controlled over the internet and connected to the Laser Quantum support team for monitoring laser performance, diagnosing opportunities and carrying out laser optimization



Drawings are for illustrative purposes only. Please contact Laser Quantum for complete engineer's drawings.

CONTACT US

Americas & Asia Pacific

Novanta Headquarters
Bedford, USA 01730
P +1-781-266-5700

Europe, Middle East, Africa

Novanta Europe GmbH
Wackersdorf, Germany
P +49-9431-7984-0

China

Synrad China Sales & Service Office
Shenzhen, China
P +86-755-8280-538

Suzhou, China
P +86-512-6283-7080

Japan

Novanta Sales & Service Office
Tokyo, Japan
P +81-3-5753-2460



www.novanta.com

光と人をつなぐ

Rayture Systems



レイチャーシステムズ株式会社

〒160-0006 東京都新宿区舟町7 ロクサンビル7F

TEL : 03-3351-0717 FAX : 03-3351-6771

URL : <http://www.rayture-sys.co.jp>

E-mail : laser@rayture-sys.co.jp