




NANO SERIES

Ultra-Compact, Rugged, Q-Switched Nd:YAG Lasers

2 0 2 0

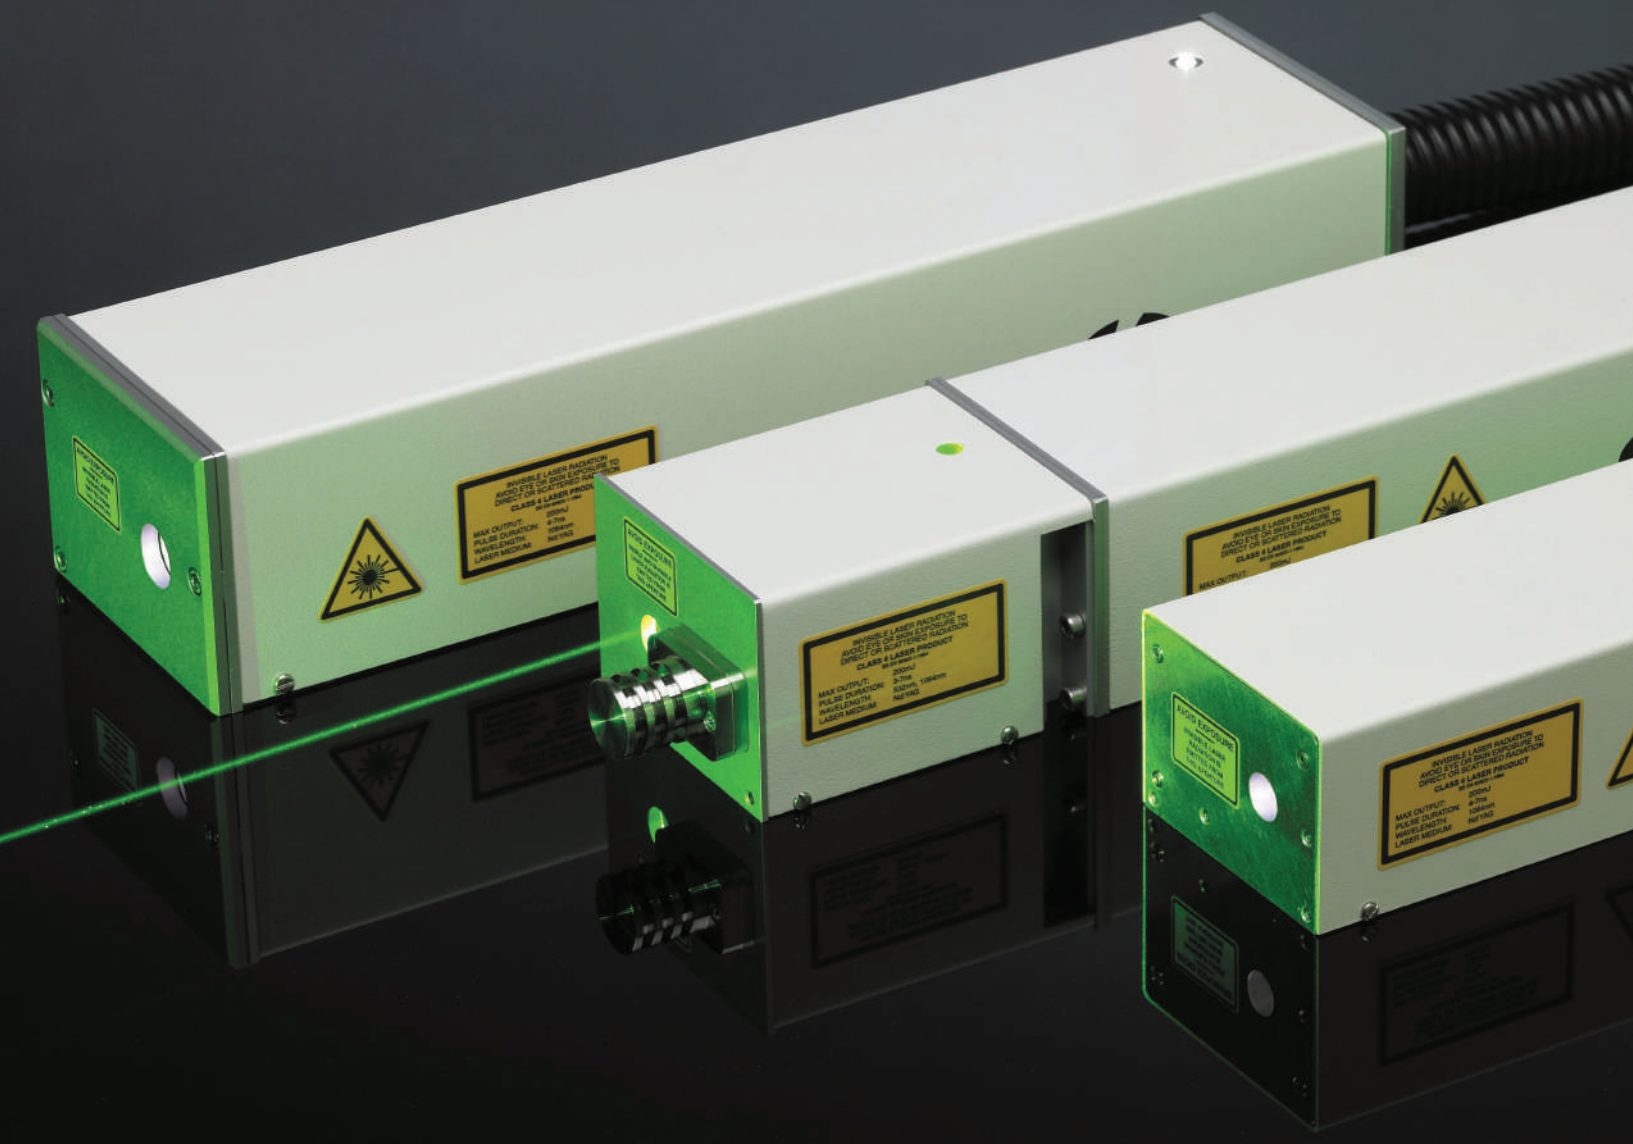

Nano Series

Ultra-compact, rugged Q-switched pulsed Nd:YAG lasers

APPLICATIONS

- **LIBS & Spectroscopy**
- **LIDAR & Remote sensing**
- **Sensor diagnostics**
- **Metrology**
- **Material processing**
- **Ablation**
- **Pump source**
- **Photochemistry**
- **Non linear optics**
- **Ultrasonic testing**
- **Flash photolysis**
- **LIF & ESPI**

There are three laser heads in the Nano series: the Nano S, the Nano L and the Nano T. All three laser heads are fundamentally the same in terms of construction: they are all machined from a solid block of aluminium, have electronic intra-cavity safety shutters, fully sealed Pockels cells, stainless steel close-coupled pumping chambers and easily adjustable mirrors and optics.

The design of the Nano range facilitates the connection of any power supply to any head. This benefits the customer both in terms of size and cost of the laser, as the system provided will be optimally tailored to the requirements of the customer.

THE NANO S

The Nano S is one of the smallest 'end user' laser systems of its type in the world with a footprint of just 292mm x 82mm, with energies of up to 150mJ per pulse and repetition rates of up to 50Hz. The Nano S can be configured with a stable or super-Gaussian resonator, and can be fitted with an intra-cavity aperture to give a true TEM₀₀ output.

THE NANO L

The Nano L has a footprint of only 380mm x 96mm. Output energies of up to 340mJ and repetition rates of up to 100Hz are available. The Nano L can be supplied with either a stable or super-Gaussian resonator. If required, a removable intra-cavity aperture can also be fitted to give a true TEM₀₀ output.

THE NANO T

The Nano T has a footprint of 520mm x 96mm. Output energies of up to 290mJ and repetition rates of up to 50Hz are available. The Nano T is configured as a stable telescopic resonator, and can be fitted with a removable intra-cavity aperture to give a true TEM₀₀ output.



LUCi Touchscreen

FEATURES

- **Output energies up to 340mJ**
- **Repetition rates up to 100Hz**
- **2nd, 3rd, 4th and 5th harmonics available**
- **Fully motorised optical attenuator**
- **Fully interlocked electrical safety shutter**
- **LUCi touchscreen or PC interface**
- **Stable, stable telescopic or super-Gaussian coupled resonator**
- **Compact and rugged**
- **TEM₀₀ option available**
- **Long flashlamp lifetime and easy replacement**
- **Air-cooled PSU (internal water)**




Resonator Types

Litron offers five distinct resonator configurations, more than any other manufacturer. The information below can be used to identify which resonator is best suited to an application.


A. Stable

This multimode resonator gives excellent energy extraction and beam uniformity but somewhat high divergence and M^2 values. Stable resonators allow the user to alter parameters such as input energy (flashlamp voltage) and repetition rate with very little variation in beam quality.





B. Stable Telescopic

This variation on the multimode stable design places an intracavity telescope in the rear of the resonator. This has two effects of compensating for thermal lensing in the laser rod and making the resonator appear considerably longer, without making it significantly more so, meaning reasonably short pulses are still obtained. The outcome is a laser beam with very good spatial uniformity and efficient energy extraction but with much better divergence and M^2 characteristics than a conventional stable resonator. The resonator is still flexible in terms of input energy and repetition rate and can be made even more so by means of adjustments to the telescope.

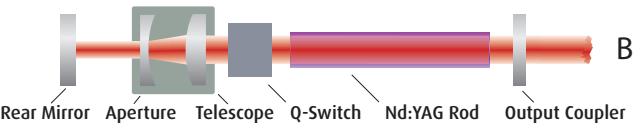

C. Gaussian-Coupled Unstable

This resonator comprises a P-branch confocal unstable resonator with a graded reflectivity mirror (GRM) for the output coupler. The GRM unstable resonator provides lower values still for divergence and M^2 , with reasonable extraction efficiency but the downside is less uniform near field uniformity and much less flexibility in varying the input energy and repetition frequency.

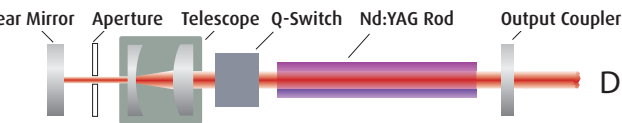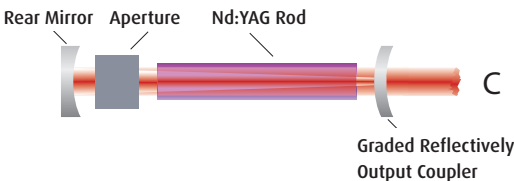


D. Stable Telescopic TEM₀₀


This is a variation on the stable telescopic resonator that additionally employs an intracavity aperture to suppress higher order transverse modes resulting in a beam with near diffraction limited, single mode TEM₀₀ quality, with a uniform Gaussian profile.

E. Stable TEM₀₀

Compared to a stable telescopic TEM₀₀ laser, a smaller footprint, shorter pulse duration and greater input energy flexibility are the main benefits. However, lacking the telescope, the extraction efficiency is lower.

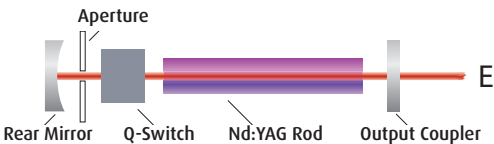

Nano Uncovered

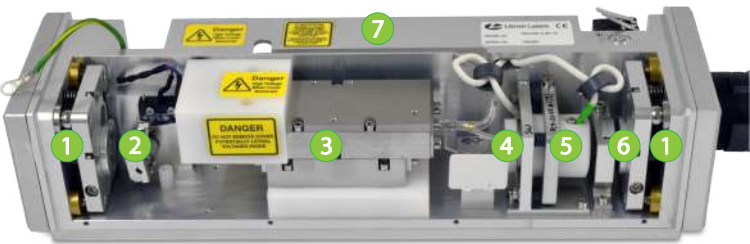

1 MIRROR MOUNTS

- High precision stable mirror mounts locked in position to prevent any alignment change.

2 INTERLOCKED ELECTRONIC SAFETY SHUTTER

- To prevent the laser being started with the shutter open.

3 PUMPING CHAMBER

- Two extremely close coupled ceramic reflectors ensure uniform pumping of the laser rod.
- Simple flashlamp replacement.

4 POLARISER

5 POCKELS CELL

- KD*P crystal sealed in a rugged housing.

6 QUARTER-WAVE PLATE

7 RESONATOR HOUSING

- Machined from a solid piece of aluminium ensuring exceptional mechanical rigidity and thermal stability.

TECHNICAL DATA


Stable Resonator Nano S

| Model | Nano S 130-10 | Nano S 120-20 | Nano S 60-30 | Nano S 30-50 |
|--|-----------------------|-----------------------|-----------------------|-----------------------|
| Max Repetition Rate (Hz) | 10 | 20 | 30 | 50 |
| Output Energy (mJ) ⁽¹⁾ | | | | |
| 1064nm | 130 | 120 | 60 | 30 |
| 532nm | 65 | 60 | 30 | 15 |
| 355nm | 25 | 15 | 10 | 6 |
| 266nm | 16 | 12 | 6 | 3 |
| 213nm | 3 | 3 | 2 | 1 |
| Parameter | | | | |
| Pulse - Pulse Stability (±%) ⁽²⁾ | 2 | 2 | 2 | 2 |
| Beam Diameter (mm) | 4 | 4 | 4 | 4 |
| Beam Divergence (mrad) ⁽³⁾ | <2.5 | <2.5 | <2.0 | <2.0 |
| Pulse Length @ 1064nm (ns) | 4-7 | 4-7 | 4-7 | 4-7 |
| Pointing Stability (μrad) ⁽⁴⁾ | <70 | <70 | <70 | <70 |
| Resonator Type | Stable | Stable | Stable | Stable |
| TEM ₀₀ (mJ) @ 1064nm ⁽⁵⁾ | 10 | 10 | 8 | 8 |
| Lamp Life (pulses) | 5x10 ⁷ | 5x10 ⁷ | 5x10 ⁷ | 5x10 ⁷ |
| Timing Jitter (ns) ⁽⁶⁾ | <0.5 | <0.5 | <0.5 | <0.5 |
| Services | | | | |
| Voltage (VAC) | 90-250 | 90-250 | 90-250 | 90-250 |
| Frequency (Hz) | 47-63 | 47-63 | 47-63 | 47-63 |
| Power | Single Phase | Single Phase | Single Phase | Single Phase |
| Ambient (°C) ⁽⁷⁾ | 5-35 | 5-35 | 5-35 | 5-35 |
| Consumption (W) | <300 | <300 | <300 | <300 |
| PSU Type | LPU350 ⁽⁸⁾ | LPU350 ⁽⁸⁾ | LPU350 ⁽⁸⁾ | LPU350 ⁽⁸⁾ |

(1) Variable by means lamp voltage control. The maximum energy is quoted for a system having a 15 minute warm-up period.
(2) Peak-to-Peak Energy - 99% of pulses at 1064nm.
(3) Irreducible beam divergence measured full angle for cone containing 90% of energy.
(4) Full angle for 99% of shots.
(5) With the addition of optional intra-cavity aperture. Factory fitted option on the Nano S range, this is not retrofittable. On the Nano L range the TEM₀₀ aperture can be added or removed.
(6) RMS jitter, measured with respect to the Q-switch trigger input.
(7) 0-80% non condensing atmosphere.
(8) LPU350R option available as 4U 19" rackmountable PSU.
(9) 90-250VAC available on request. LPU1000R option available as 7U 19" rackmountable PSU.

Stable Resonator Nano L

| Model | Nano L 340-10 | Nano L 200-10 | Nano L 290-20 | Nano L 200-20 | Nano L 200-30 | Nano L 150-50 | Nano L 90-100 |
|--|-----------------------|-----------------------|------------------------|-----------------------|------------------------|------------------------|------------------------|
| Max Repetition Rate (Hz) | 10 | 10 | 20 | 20 | 30 | 50 | 100 |
| Output Energy (mJ) ⁽¹⁾ | | | | | | | |
| 1064nm | 340 | 200 | 290 | 200 | 200 | 150 | 90 |
| 532nm | 200 | 110 | 145 | 110 | 110 | 75 | 50 |
| 355nm | 45 | 40 | 50 | 40 | 40 | 30 | 15 |
| 266nm | 30 | 25 | 30 | 25 | 25 | 15 | 10 |
| 213nm | 5 | 4 | 5 | 3 | 3 | 3 | 2 |
| Parameter | | | | | | | |
| Pulse - Pulse Stability (±%) ⁽²⁾ | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Beam Diameter (mm) | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 |
| Beam Divergence (mrad) ⁽³⁾ | <2.0 | <2.0 | <2.0 | <2.0 | <2.0 | <2.0 | <2.0 |
| Pulse Length @ 1064nm (ns) | 7-9 | 6-9 | 7-9 | 6-9 | 6-9 | 7-9 | 7-9 |
| Pointing Stability (μrad) ⁽⁴⁾ | <70 | <70 | <70 | <70 | <70 | <70 | <70 |
| Resonator Type | Stable | Stable | Stable | Stable | Stable | Stable | Stable |
| TEM ₀₀ (mJ) @ 1064nm ⁽⁵⁾ | 20 | 20 | 20 | 20 | 20 | 20 | 20 |
| Lamp Life (pulses) | 5x10 ⁷ | 5x10 ⁷ | 5x10 ⁷ | 5x10 ⁷ | 5x10 ⁷ | 5x10 ⁷ | 5x10 ⁷ |
| Timing Jitter (ns) ⁽⁶⁾ | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| Services | | | | | | | |
| Voltage (VAC) | 90-250 | 90-250 | 220-250 | 90-250 | 220-250 | 220-250 | 220-250 |
| Frequency (Hz) | 47-63 | 47-63 | 47-63 | 47-63 | 47-63 | 47-63 | 47-63 |
| Power | Single Phase | Single Phase | Single Phase | Single Phase | Single Phase | Single Phase | Single Phase |
| Ambient (°C) ⁽⁷⁾ | 5-35 | 5-35 | 5-35 | 5-35 | 5-35 | 5-35 | 5-35 |
| Consumption (W) | <350 | <350 | <450 | <650 | <650 | <850 | <850 |
| PSU Type | LPU350 ⁽⁸⁾ | LPU350 ⁽⁸⁾ | LPU1000 ⁽⁹⁾ | LPU350 ⁽⁸⁾ | LPU1000 ⁽⁹⁾ | LPU1000 ⁽⁹⁾ | LPU1000 ⁽⁹⁾ |




Stable beam profile, 1064nm near field

Super-Gaussian Coupled Resonator - Nano SG


| Model | Nano SG 150-10 | Nano SG 120-20 | Nano SG 60-30 | (1) Variable by means of Q-switch delay. The maximum energy is quoted for a system having a 15 minute warm-up period. |
|---|-------------------|-------------------|-------------------|--|
| Max Repetition Rate (Hz) | 10 | 20 | 30 | (2) Peak-to-Peak Energy - 99% of pulses at 1064nm. |
| Output Energy (mJ) (1) | | | | (3) Irreducible beam divergence measured full angle for cone containing 90% of energy. |
| 1064nm | 150 | 120 | 60 | (4) Full angle for 99% of shots. |
| 532nm | 75 | 65 | 35 | (5) RMS jitter, measured with respect to the Q-switch trigger input. |
| 355nm | 30 | 15 | 10 | (6) 0-80% non condensing atmosphere. |
| 266nm | 15 | 12 | 6 | (7) LPU350R option available as 4U 19" rackmountable PSU. |
| 213nm | 3 | 2 | 1 | (8) 200VAC available on request. LPU1000R option available as 7U 19" rackmountable PSU. |
| Parameter | | | | |
| Pulse - Pulse Stability ($\pm\%$) (2) | 2 | 2 | 2 | |
| Beam Diameter (mm) | 5 | 4 | 4 | |
| Beam Divergence (mrad) (3) | <0.7 | <0.5 | <0.5 | |
| Fit to Gaussian N/F field (%) | 70/95 | 70/95 | 70/95 | |
| M ² | <2 | <2 | <2 | |
| Pulse Length @ 1064nm (ns) | 4-6 | 6-8 | 6-8 | |
| Pointing Stability (μ rad) (4) | <70 | <70 | <70 | |
| Lamp Life (pulses) | 5x10 ⁷ | 5x10 ⁷ | 5x10 ⁷ | |
| Timing Jitter (ns) (5) | <0.5 | <0.5 | <0.5 | |
| Services | | | | |
| Voltage (VAC) | 90-250 | 90-250 | 90-250 | |
| Frequency (Hz) | 47-63 | 47-63 | 47-63 | |
| Power | Single Phase | Single Phase | Single Phase | |
| Ambient (°C) (6) | 5-35 | 5-35 | 5-35 | |
| Consumption (W) | <350 | <350 | <350 | |
| PSU Type | LPU350 (7) | LPU350 (7) | LPU350 (7) | |

Super Gaussian Coupled Resonator - Nano LG

| Model | Nano LG 300-10 | Nano LG 225-10 | Nano LG 250-20 | Nano LG 200-20 | Nano LG 150-30 | Nano LG 130-50 |
|---|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Max Repetition Rate (Hz) | 10 | 10 | 20 | 20 | 30 | 50 |
| Output Energy (mJ) (1) | | | | | | |
| 1064nm | 300 | 225 | 250 | 200 | 150 | 130 |
| 532nm | 150 | 120 | 125 | 110 | 75 | 65 |
| 355nm | 60 | 50 | 45 | 40 | 25 | 20 |
| 266nm | 35 | 30 | 30 | 25 | 18 | 15 |
| 213nm | 6 | 5 | 5 | 4 | 2 | 2 |
| Parameter | | | | | | |
| Pulse - Pulse Stability ($\pm\%$) (2) | 2 | 2 | 2 | 2 | 2 | 2 |
| Beam Diameter (mm) | 5 | 5 | 5 | 5 | 5 | 5 |
| Beam Divergence (mrad) (3) | <0.7 | <0.5 | <0.7 | <0.5 | <0.5 | <0.5 |
| Fit to Gaussian N/F field (%) | 70/95 | 70/95 | 70/95 | 70/95 | 70/95 | 70/95 |
| M ² | <2 | <2 | <2 | <2 | <2 | <2 |
| Pulse Length @ 1064nm (ns) | 4-6 | 4-6 | 4-6 | 4-6 | 4-6 | 4-6 |
| Pointing Stability (μ rad) (4) | <100 | <70 | <100 | <70 | <100 | <100 |
| Lamp Life (pulses) | 5x10 ⁷ | 5x10 ⁷ | 5x10 ⁷ | 5x10 ⁷ | 5x10 ⁷ | 5x10 ⁷ |
| Timing Jitter (ns) (5) | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| Services | | | | | | |
| Voltage (VAC) | 220-250 | 90-250 | 220-250 | 90-250 | 220-250 | 220-250 |
| Frequency (Hz) | 47-63 | 47-63 | 47-63 | 47-63 | 47-63 | 47-63 |
| Power | Single Phase | Single Phase | Single Phase | Single Phase | Single Phase | Single Phase |
| Ambient (°C) (6) | 5-35 | 5-35 | 5-35 | 5-35 | 5-35 | 5-35 |
| Consumption (W) | <650 | <650 | <650 | <650 | <650 | <650 |
| PSU Type | LPU1000 (8) | LPU350 (7) | LPU1000 (8) | LPU350 (7) | LPU1000 (8) | LPU1000 (8) |



Super-Gaussian beam profile,
1064nm near field



Super-Gaussian beam profile,
1064nm far field


TECHNICAL DATA

Stable Telescopic Resonator Nano T


| Model | Nano T 290-10 | Nano T 250-10 | Nano T 270-20 | Nano T 250-20 | Nano T 100-50 |
|--|-----------------------|-----------------------|-----------------------|-----------------------|------------------------|
| Max Repetition Rate (Hz) | 10 | 10 | 20 | 20 | 50 |
| Output Energy (mJ) ⁽¹⁾ | | | | | |
| 1064nm | 290 | 250 | 270 | 250 | 100 |
| 532nm | 145 | 125 | 135 | 125 | 50 |
| 355nm | 50 | 45 | 45 | 45 | 20 |
| 266nm | 27 | 30 | 25 | 30 | 15 |
| 213nm | 4 | 4 | 3 | 4 | 2 |
| Parameter | | | | | |
| Pulse - Pulse stability (±%) ⁽²⁾ | 2 | 2 | 2 | 2 | 2 |
| Beam Diameter (mm) | 6.35 | 5 | 5 | 5 | 5 |
| Beam Divergence (mrad) ⁽³⁾ | <0.8 | <0.8 | <0.8 | <0.8 | <0.8 |
| Pulse Length @ 1064nm (ns) | 7-11 | 7-11 | 7-11 | 7-11 | 7-11 |
| Pointing Stability (µrad) ⁽⁴⁾ | <70 | <70 | <70 | <70 | <70 |
| Resonator Type | Telescopic | Telescopic | Telescopic | Telescopic | Telescopic |
| TEM ₀₀ (mJ) @ 1064nm ⁽⁵⁾ | 40 | 40 | 40 | 40 | 25 |
| Lamp Life (pulses) | 5x10 ⁷ | 5x10 ⁷ | 5x10 ⁷ | 5x10 ⁷ | 5x10 ⁷ |
| Timing Jitter (ns) ⁽⁶⁾ | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| Services | | | | | |
| Voltage (VAC) | 90-250 | 90-250 | 90-250 | 90-250 | 220-250 |
| Frequency (Hz) | 47-63 | 47-63 | 47-63 | 47-63 | 47-63 |
| Power | Single Phase | Single Phase | Single Phase | Single Phase | Single Phase |
| Ambient (°C) ⁽⁷⁾ | 5-35 | 5-35 | 5-35 | 5-35 | 5-35 |
| Consumption (W) | <650 | <350 | <650 | <650 | <650 |
| PSU Type | LPU350 ⁽⁸⁾ | LPU350 ⁽⁸⁾ | LPU350 ⁽⁸⁾ | LPU350 ⁽⁸⁾ | LPU1000 ⁽⁹⁾ |

All specifications at maximum repetition rate unless otherwise stated.

- (1) Variable by means of Q-switch delay. Energy stability remains within specification from 20% to 100% of output energy. The maximum energy quoted for a system having a 15 minute warm-up period.
(2) Peak-to-Peak Energy - 99% of pulses at 1064nm.
(3) Irreducible beam divergence measured full angle for cone containing 90% of energy.
(4) Full angle for 99% of shots.
(5) With the addition of optional removable TEM₀₀ intra-cavity aperture.
(6) RMS jitter, measured with respect to the Q-switch trigger input.
(7) 0-80% non condensing input. LPU350R option available as 4U 19" rackmountable PSU.
(8) LPU350R option available as 4U 19" rackmountable PSU.
(9) 90-200VAC available on request. LPU1000R option available as 7U 19" rackmountable PSU.



Stable telescopic beam profile, 1064nm near field





TEM₀₀ beam profile, 1064nm near field

Options


Motorised Optical Attenuator

A motorised optical attenuator allows the user to vary the pulse energy remotely while also maintaining the temporal and spatial profiles of the beam. The pulse energy can be controlled precisely via the software while keeping the beam profile, pulse duration and pulse stability constant.

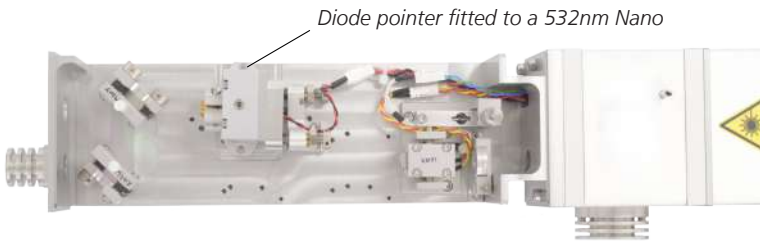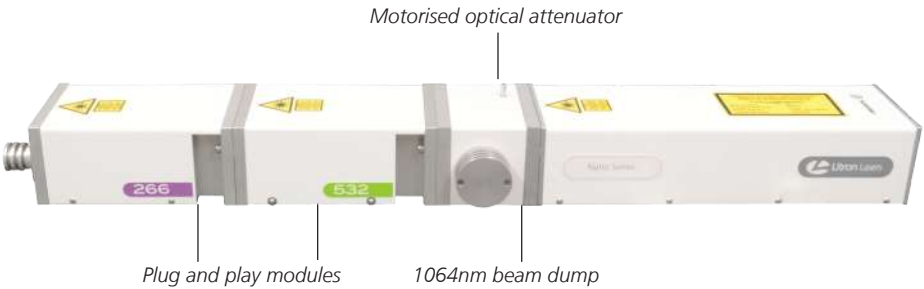

Diode Pointer

Nano series lasers can be specified with a low-power visible CW diode pointer. This is useful for aligning external optics or configuring an experimental setup. The diode pointer should be specified at the time of order.

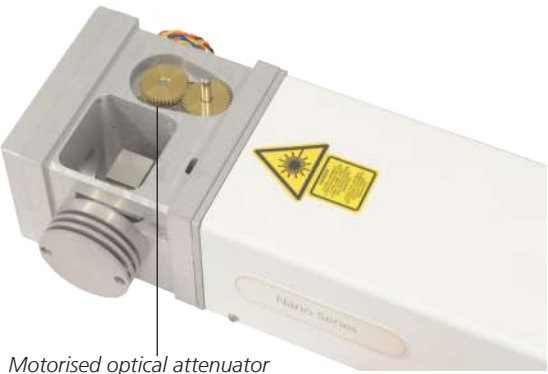


Nano Series Model Options

Nano flexible output models

Nano lasers give the flexibility to access all the harmonic wavelengths from 1064nm to 266nm by removing and re-combining the appropriate harmonic generation units (HGUs).

All Nano harmonic models are available with the motorised 1064nm variable optical attenuator option fitted.

The model options shown here are available for all Nano S, L and T lasers.

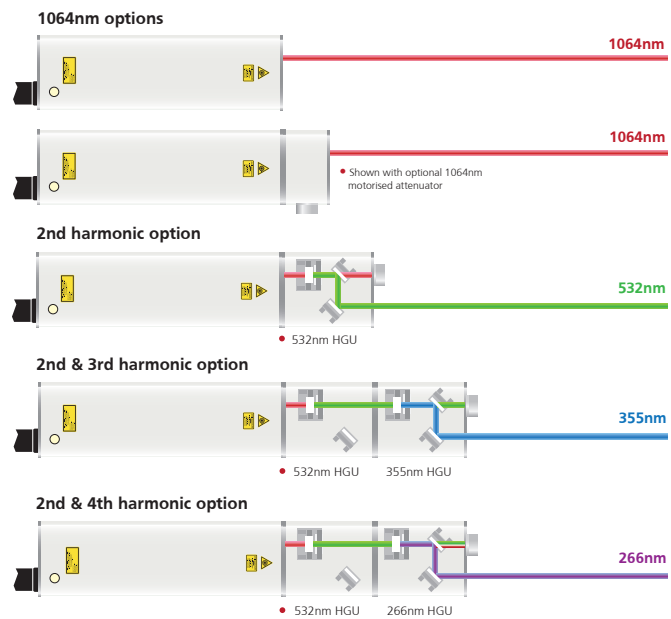


Nano fixed output models

Nano lasers can be offered with fixed output where optimisation of the 1064nm or a single harmonic wavelength is desired.

All Nano harmonic models are available with the motorised 1064nm variable optical attenuator option fitted.

The model options shown here are available for all Nano S, L and T lasers.

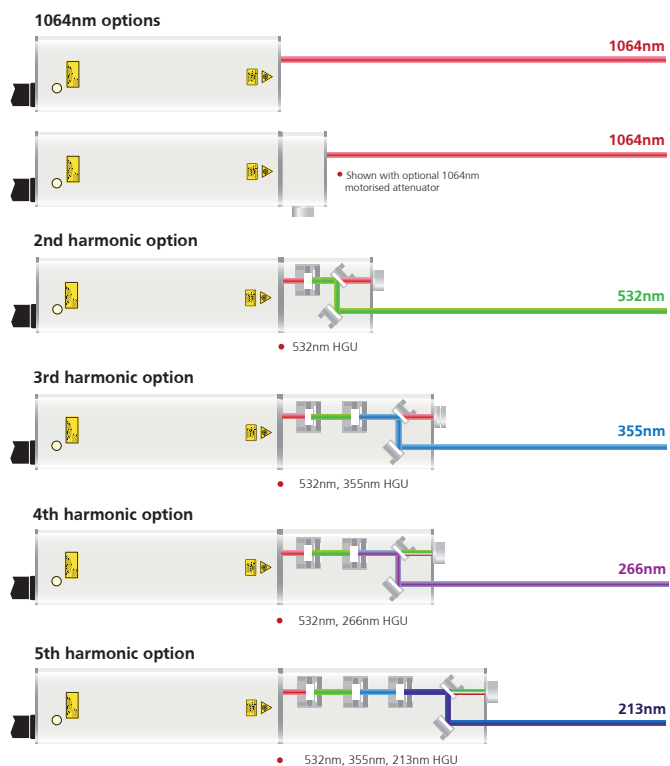


*For details on 213nm, please contact Litron directly


MECHANICAL DATA

All dimensions in mm unless stated.


Nano S Laser Head with 2nd, 3rd/ 4th HGU. (5th HGU length is 265mm. Modular Harmonic length is 145mm.)

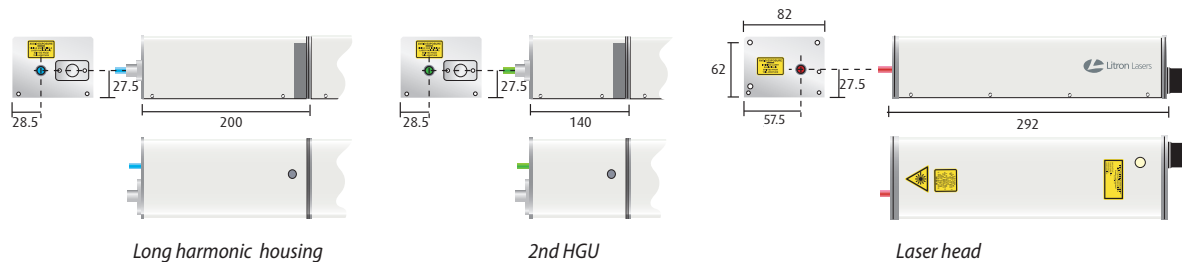


Nano L Laser Head with 2nd, 3rd/ 4th HGU. (5th HGU length is 260mm. Modular Harmonic length is 155mm.)

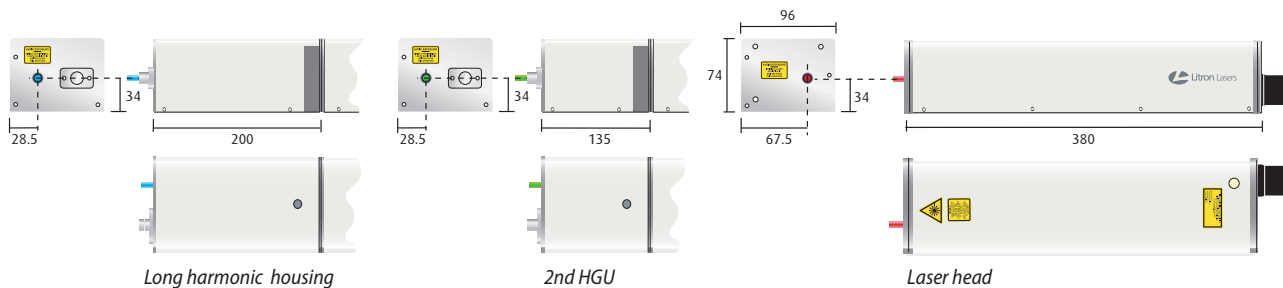


Nano T Laser Head with 2nd, 3rd/ 4th HGU. (5th HGU length is 260mm. Modular Harmonic length is 155mm.)

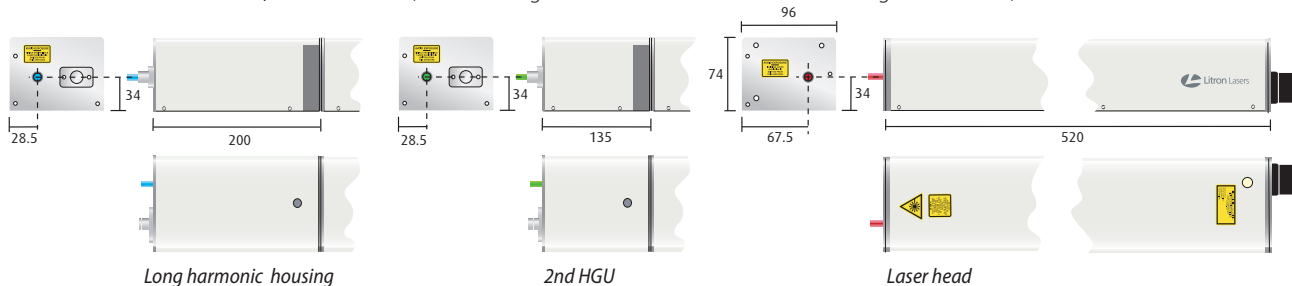


LPU1000 PSU

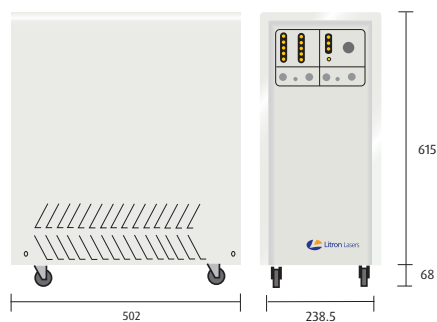

LPU350 PSU

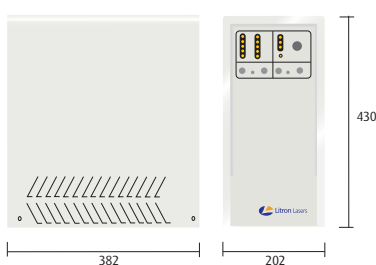

LPU350R PSU



LUCi Touchscreen



Litron Lasers Ltd

8 Consul Road, Rugby,
Warwickshire CV21 1PB
England.

T +44 (0)1788 574444
F +44 (0)1788 574888
E sales@litron.co.uk



www.litronlasers.com

光と人をつなぐ

Rayture Systems



レイチャーシステムズ株式会社

〒160-0006 東京都新宿区舟町7 ロクサンビル7F

TEL : 03-3351-0717 FAX : 03-3351-6771

URL : <http://www.rayture-sys.co.jp>

E-mail : laser@rayture-sys.co.jp